Quick Start Guide

Model: ZNET2850WHD

Product Structure

Packing list

*The pictures are for reference only, please refer to real subjects.
*Power line does not provided with the function of data transmission.

Main features

- WiFi wireless transmission;
- Support 720P HD cloud video recording operation;
- Can read images saved in cloud storage anytime;
- Easy to install and use, and can be easily set by QR code;
- Built-in IR-CUT wide-angle lens, images are with high definition and delicate;
- Support motion detection;
- Message service, master trends at first time;

Specifications

Items	Specifications
Image sensor	1/4" CMOS
Pixel size	3um x 3um
Minimum illumination	0LUX (IR LED ON)
Video resolution	High definition: 1280 x 720 General definition: 640 x 360
Frame rate	30fps
Viewing angel	80°(horizontal)
Night vision distance	5M
Audio input	Built-in microphone
Wireless network	WIFI,802.11 b/g/n
Wireless safety	WEP/WPA/WAP2/WPA-PSK/WPA2-PSK
Operation system support	Android/iOS
Motion detection	Support
Power supply	Micro USB 5V
Consumption current	270mA (IR LED OFF) / 490mA (IR LED ON)
Operation Temperature	-10℃ ~ +50℃
Storage Temperature	-20℃ ~ +60℃
Operation humidity	15% ~ 85%RH
Dimensions	93.5x88.7x41mm(Folded state)
Weight	190g

Installation

1. Two ways to place the camera.

Horizontal placement :

Place the camera lens directly onto the horizontal plane.

Fix and installation: users can choose to fix directly or install with side fastener to the wall.

① Drill on the wall, knock in the nail, and then fix the wall hanging bracket onto the proper monitoring position with screws.

② Drill on the wall, knock in the nail, turn the screws into the nail, and then slide the wall hanging bracket onto the screws.

After fixing the wall hanging bracket, stick the DV into the wall hanging bracket.
Notes: align the slots before pressing down.

2. Camera lens plug in. Insert one end of the power line into the supply hub at the back of the camera lens, and the other end into power outlet, and the indicator light lights up. Notes: power line plug and camera lens jack are marked as the same plane.

Operation

*(Here take installation operation of Android client for example; iPhone terminal can refer to Android client.)

1. Download and install client software

Download way of client APP for iOS system:

① Open iPhone client end, and click icon of App Store.
② Search keyword. "Walle" in "APP Store".
③ Click"install"and the software will be installed to the smart client.

Download way of client APP for Android system:

① Open Android smart client, and enter "GOOGLE PLAY" store.
② Search software "Walle" and download.
③ Click"install"and the software will be installed to the smart client.

2. Register an account. Open APP software, and register an account first. Below image will show if it is successful.

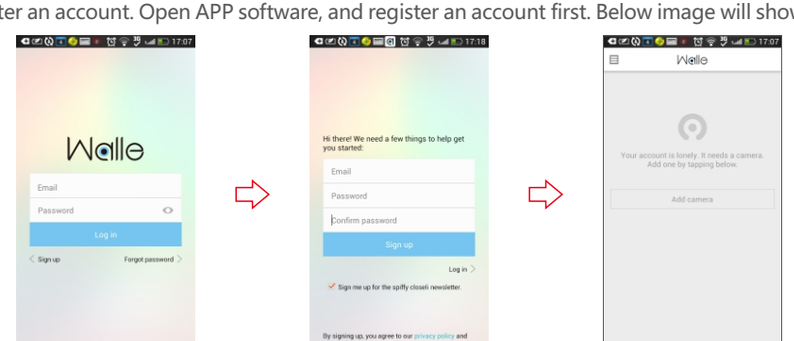

Quick Start Guide

3. Add camera.




Back
Add camera
Plug your camera in and makes sure the red light turns on. You'll also need to peel the protective film off the lens.
Next



Press and hold the setting button at the back of the camera for 2 seconds till the red light flashes. when this is a sound of "di"




Back
Scan QR code
10~20 cm
4~8 inches
Hold the QR code in front of the camera. Once the camera is connected to the Wi-Fi, you will hear a "beep beep!" sound.
Don't show this again
OK

Scan the generated QR code with camera lens. Click "Yes" step when there is two sound of "didi" and the green light flashes.



Long time green light means adding succeeded. Click"finish".



4. View videos.





Events Cloud services recorded video.

Favorites Video clips can be saved to a mobile phone.

Plan User can choose to pay packages.

Settings

By clicking button "setting" on the listing interface, users can check account information and change parameter, etc.

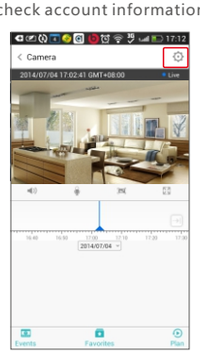

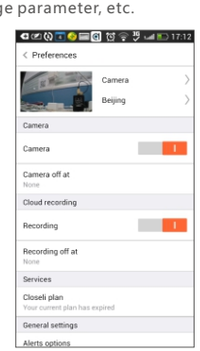



*** Note:**

1. 50Hz indicates Europe, China video standard.
2. 60Hz indicates America video standard.
3. When reverse the camera to install, you can choose to rotate the image 180 degrees.